

UM2508 Pearson 8" x 1.5" Guillotine

Stock Code: UM2508





UM2508 Pearson 8" x 1.5" Guillotine

Specification:

Cutting Length in	8
Cutting capacity in	1.5
Voltage V	415

UM10070 Enerpac Hydraulic H-Frame Pressbrake

Stock Code: UM10070



UM10070 Enerpac Hydraulic H-Frame Pressbrake

The heavily constructed PBH press brake model is of an H frame design and is fitted with heavy duty top and bottom press brake tools, ideal for a whole variety of heavier bending operations. These models feature adjustable limit switches for ram stroke and return, as well as twin guidance pistons in addition to the main ram. The machine operates at a safe working speed and is also fitted with a two handed control to ensure the operator is well away from the working area.

Features:

- Very heavy H frame design
- Top & bottom press brake tooling
- Safe working speed
- Quiet hydraulic system
- Stepless pressure adjustment
- Hydraulic cylinder mounted above tooling providing vertical pressure
- Twin guidance pistons in addition to the main ram
- Stepless stroke adjustment with limit switches controlling the ram stroke and return
- Adjustable bed height with two hardened pins
- Control console with two handed operation
- Ideal for low or high volume operation

Specification:

Power tonnes	150
Bending length mm	1520
Stroke mm	300
Advance speed mm/sec	9
Working speed mm/sec	5
Return speed mm/sec	10
Motor kW	11
Length mm	2500
Width mm	1000
Height mm	2380
Weight kg	3100

UM10103 Ursviken Hydraulic Variable Rake Guillotine



UM10103 Ursviken Hydraulic Variable Rake Guillotine

Features:

- Variable Rake
- Rapid Blade Gap Adjustment
- Powered Backgauge
- Lift-up Front Finger Guard (with safety microswitch)
- c/w Front Squaring Arms

Technical Specification:

- Cutting Length: 3000mm
- Cutting Capacity: 13mm mild steel
- Approx. Weight: 13 tonnes

UM10105 Roundo R-3 Section Bending Rolls

Stock Code: UM10105



UM10105 Roundo R-3 Section Bending Rolls

Features/Specification:

- Heavy Duty Construction
- Shaft Diameters: 75mm
- Shaft Length: 200mm
- Roll Diameter: 225mm
- Motor Power: 4kW
- c/w Full set of Modular Forming Rolls for flats/squares/angles

Capacities:

- Let Out: 75 x 75 x 7mm M/S Angle
- Flat Bar: 120mm Wide x 25mm Thick
- Round Tube: 3 inch / 88.9mm x 4mm wall

UM2029 LVD 3m x 175T CNC Pressbrake

Stock Code: UM2029



UM2034 Barnes 8ft x 1/8" Pressbrake

Stock Code: UM2034

UM2534 Cater 1300mm x 3mm Mechanical Guillotine

Stock Code: UM2534



UM10037 SMT 12H10 3.6m x 200T Pressbrake

Stock Code: UM10037



UM10053 Europa Centurion CU5 Vertical Milling Machine

Stock Code: UM10053



UM10053 Europa Centurion CU5 Vertical Milling Machine

Features:

- c/w 3 Axis DRO
- ISO 50 spindle taper allowing a wide variety of tooling to be used.
- Turcite slide-way linings giving improved cutting performance, low slide-way friction and low ware
- DC servo feed drive to all axes via fully covered recirculating ball-screws, giving infinitely variable speeds.
- Dual hand wheels allow the machine to be operated from either side of the knee
- Automatic lubrication system.
- Heavy duty knee supports utilising double locking.
- Heavy table loads of up to 1800 kg can be easily accommodated
- Pendant mounted controls for ease of operation.
- Complies fully with current EC Machinery
- Directives (CE Mark)

Specification:

Table size mm	1635 x 460
No of T-slots	5
Width of T-slots mm	18
Distance between slots mm	80
Longitudinal travel mm	1300
Vertical travel (knee) mm	440
Cross travel (ram) mm	650
Min spindle nose to table surface mm	40
Spindle taper INT	50
No of Spindle speeds	27
Spindle speed range rpm	30 - 2050
Longitudinal powerfeedsw (inf. variable) mm/min	10 - 1000
Cross (Ram) powerfeeds (inf. variable) mm/min	10 - 1000
Vertical powerfeeds (inf. variable) mm/min	5 - 500
Longitudinal rapid feed rate mm/min	2800
Cross rapid feed rate mm/min	2800
Vertical rapid feed rate mm/min	1400
Spindle motor kW	7.5
Max table load kg	1800
Length mm	2010
Width mm	2621
Height mm	1950

UM10004 Kitchen Walker E4 Radial Arm Drill

Stock Code: UM10004



UM10004 Kitchen Walker E4 Radial Arm Drill

The Kitchen Walker range of radial arm drills are supplied according to the latest UK and CE standards for working safety and have fitted DC Injection Brake units which provide instant braking of the spindle in an emergency. The components are of long lasting supreme quality and are used for many functions such as drilling, counter boring, spot facing, reaming, tapping and boring.

Features:

- The head is able to be moved along the arm to allow for drilling large workpieces

Specification:

Capacity MT	5
Spindle speed rpm	26 - 1000
Arm length ft	8
Voltage V	415

UM5013 Asquith N2R Radial Drill

Stock Code: UM5013



UM8014 XYZ KRV3000 Milling Machine

Stock Code: UM8014



UM9002 Malick Walkows Slotter

Stock Code: UM9002



UM10068 Colchester Triumph 2000 Lathe

Stock Code: UM10068



UM10069 Bridgeport Milling Machine

Stock Code: UM10069



UM10095 Kingsland 55XS Steelworker

Stock Code: UM10095



UM10100 Meyer ST2066 Lathe

Stock Code: UM10100



UM10104 Meyer ST26120D Lathe

Stock Code: UM10104



UM3057 Rusch 340 Automatic Vice Feed Bandsaw

Stock Code: UM3057



UM3057 Rusch 340 Automatic Vice Feed Bandsaw

Comes with:

- twin hydraulic shuttle vice

Specification:

Max capacity mm	340
Cutting speed m/min	20 - 95 variable
Motor kW	4
Voltage V	415

UM10057 Sterling BMSY 320 G Roller Feed Horizontal Bandsaw

Stock Code: UM10057



UM10057 Sterling BMSY 320 G Roller Feed Horizontal Bandsaw

Specification:

Capacity	
- Round mm	280 - 320
- Square mm	260 - 320
- Rectangular mm	440 x 220
Cutting Speed m/min	20 - 100
Blade size mm	3660 x 27 x 0.9
Length mm	1900
Width mm	850
Height mm	1300
Weight kg	650
Voltage V	415

UM10021 Fendo 500 SA Super Semi-Automatic Horizontal Bandsaw

Stock Code: UM10021



UM10021 Fendo 500 SA Super Semi-Automatic Horizontal Bandsaw

Specification:

Cutting capacity @ 90° mm	500
Cutting capacity @ 90° mm	400 x 400
Cutting capacity @ 90° mm	600 x 300
Blade speed m/min	20 - 100
Motor kW	22
Voltage V	415
Weight kg	600

UM4006 Comet 2000 - SV275 Coldsaw

Stock Code: UM4006



UM4006 Comet 2000 - SV275 Coldsaw

Specification:

Blade Diameter mm	275
Voltage V	415

UM1001 Addison VBS1000 Vertical Bandsaw

Stock Code: UM10001





UM1001 Addison VBS1000 Vertical Bandsaw

Capacity mm	1000
Voltage V	415

UM10084 Bomar STG 230 DGE Horizontal Bandsaw

Stock Code: UM10084



UM10084 Bomar STG 230 DGE Horizontal Bandsaw

Specification:

Capacity	90°	45°
- Round mm	230	130
- Square mm	200	130
- Rectangular mm	300 x 150	200 x 200
Blade Size mm	2710 x 27 x 0.9	
Cutting Speed m/min	28/56	
Motor Kw	1.1	
Length mm	1580	
Width mm	900	
Height mm	1250	
Weight Kg	332	
Operation	Semi-Automatic	
Vice	Manual	

UM10072 Thomas Circular Saw

Stock Code: UM10072





UM10072 Thomas Circular Saw


The Thomas range of sawing machines have been manufactured in Italy since 1957.

High quality components and attention to design has resulted in a truly heavy duty machine, well able to withstand years of intense use in today's busy workshops.

UM10087 Bianco 330 AE Automatic Vice Feed Horizontal Mitring Bandsaw

Stock Code: UM10087



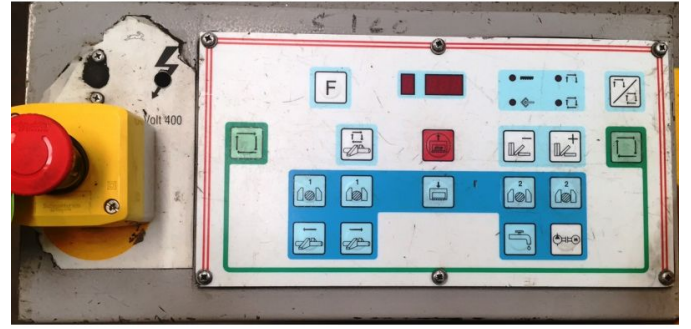

UM10087 Bianco 330 AE Automatic Vice Feed Horizontal Mitring Bandsaw

The Bianco metal cutting bandsaws are manufactured in Italy with reliability and accuracy as the first consideration. All machines have modern cast bows in special alloys to ensure one of the highest precision bandsaw ranges available. Quality electrical components are fitted to all models and quiet hydraulic pumps and fittings ensure a long working life.

Features:

- Blade feeler arm for fast approach
- Two speeds
- Shuttle vice

Specification:

Capacity

- Round mm	260
------------	-----

- Section mm	330
--------------	-----

Operation	Automatic
-----------	-----------

Vice	Powered
------	---------

UM3500 Mossner Vertical Bandsaw

Stock Code: UM3500



